

Transmit and Receive Cooperative Cognition: Protocol Design and Stability Analysis

Ahmed El Shafie[†], Amr El-Keyi[†], Tamer Khattab*, Mohamed Nafie[†]

[†]Wireless Intelligent Networks Center (WINC), Nile University, Giza, Egypt.

*Electrical Engineering, Qatar University, Doha, Qatar.

Abstract

In this paper, we investigate the stability of cognitive cooperative systems. We consider and propose three systems. The first system is the cooperative secondary transmitter-receiver system (CSTR), where, the secondary transmitter and the secondary receiver increase the spectrum availability for the secondary transmitter packets by relaying the unsuccessfully transmitted packets of the primary transmitter. We provide inner and outer bounds for the CSTR system. The second system is the non-cooperative secondary receiver with no priority (NCNPQ) queueing to any of the queues. In the second system only the secondary transmitter helps the primary user to deliver its undelivered packets by certain access probabilities assigned to each queue. The third system is the non-cooperative secondary receiver with priority queueing (NCPQ), where, the secondary transmitter assigns priority queueing to the relaying packets. The maximum stable throughput regions of the considered systems are characterized. The results reveal that the maximum stable-throughput region of the NCPQ is a subset of the maximum stable-throughput of CSTR and NCNPQ. Also, the maximum stable-throughput of the NCNPQ is a subset of the maximum stable-throughput of the CSTR system.

Index Terms

Cognitive radio, convex optimization, closure, stability analysis.

I. INTRODUCTION

The electromagnetic radio spectrum is a precious resource, the use of which by transmitters and receivers is licensed by governments [1]. Regulatory bodies have come to realize and announce that most of the time, large portions of certain licensed frequency bands remain unused. The intuitive intention behind secondary spectrum licensing is to efficiently increase the spectral usage of the network, while, depending on the type of licensing, not perturbing the primary users (higher priority users). Cognitive radio (CR) systems are seen as a candidate

prime solution that can significantly mitigate the current low spectral efficiency in the electromagnetic spectrum. A CR is defined as an intelligent wireless communication system that is fully aware of its environment and uses methodologies of learning and reasoning in order to dynamically adapt its transmission parameters (e.g., operating spectrum, modulation, and transmission power) to access portions of spectrum by exploiting the existence of spectrum holes left unused by a primary system.

Cooperative diversity is a recently emerged technique for wireless communications that has gained wide attention [2]. Most of the work on cooperative communications has concentrated on the physical layer (PHY) aspects of the problem by improving transmission parameters at the PHY. In a wireless communication network with many source-receiver pairs, cooperative transmission by relay nodes has the potential to improve the overall network performance.

In [3], the authors proposed the relaying scheme shown in Fig. 1, where the secondary transmitter is used as a relay for the undelivered packets of the higher priority user (primary user). Also, they suggested the use of admitting parameter to control the relaying fraction. In [4], an extension of the problem with multiple secondary transmitters acting as relays for the undelivered packets of the primary user was proposed, with and without opportunistic sensing scheme. In addition the authors of [4] considered priority in transmission is given to the relaying queues. In [5], the authors assumed that the cognitive user transmitter will be allowed to use the channel if the primary user not using the spectrum, and that the priority of transmission is given to the relaying queue. Also, it was assumed that the secondary will decide to relay a certain fraction f (adaptive admission control parameter) of the undelivered packets of the primary user to minimize the secondary user delay subject to a power budget for the relayed primary packets. In [6], the authors characterized fundamental issues in a shared channel where the users have different priority levels. Also, they characterized the stable-throughput region in a two user cognitive shared channel where the primary user has unconditional access to the channel while the secondary user transmits its packets with some access probability p . In [7], the authors proposed a cluster of secondary users helping the primary user with a single relaying queue accessible by all the secondary users. In [8], the authors considered a network with two primary users and one secondary user relays their undelivered packets in the free time slots. In [9], a multiple primary users and one secondary user capable of relaying was considered.

We consider a slotted time-division multiple-access (TDMA) framework in which each time slot is assigned only to one terminal, i.e., orthogonal multiple access. If the primary system does not have a packet to transmit in its time slot, then this time slot is not utilized. These unutilized time slots are wasted channel resources that could be used to enhance the system performance and spectral efficiency. The cognitive system will be allowed to utilize the unused channel resources.

In this work, we propose a novel cognitive system with the concept of cooperation. In the cooperative secondary transmitter-receiver system (CSTR), the cognitive system with its transmitter receiver pair tries to utilize the periods of silence of the primary transmitter in order to increase the reliability of communications against random channel fades and to allow the secondary user to utilize the channel effectively. In particular, when the secondary system

senses the channel for empty time slots, the slots are then used to help the primary system, and/or to allow the secondary user's packets to be served. In the non-cooperative secondary receiver with no priority queueing (NCNPQ) system, only the secondary transmitter helps the primary user to deliver its undelivered packets by certain access probabilities assigned to each queue. In the non-cooperative secondary receiver with priority queueing (NCPQ) system, the traffic of the secondary transmitter will not be served until the relaying queue empties.

We make the following contributions in this paper.

- We propose a new cooperative system (CSTR), which to the best of our knowledge, has not been proposed before in a cognitive networks where the receiver of the cognitive user helps the secondary transmitter to utilize the spectrum.
- The main differences between CSTR system and [4] are as follows. In [4], the authors considered multiple users each of them has its own arrival rate and a priority in transmission was given to the relaying queue. Also, the authors provided only an inner bound on the secondary network stability region. In this work, we investigate the stability region of a secondary system in presence of a primary system. We propose queues' access probabilities, so there is no priority in transmission given to any of the queues. Also, we consider another optimization parameter which is the priority of keeping (keeping factor) the undecodable primary packet at the primary receiver. We provided inner bound and outer bounds on the stability of the primary-secondary network, i.e., the maximum stable-throughput of the secondary transmitter given certain average arrival rate to the primary transmitter.
- We characterize the optimal resources (e.g., adaptive acceptance factors, and access probabilities assigned to each queue) used by the secondary transmitter and its receiver, which maximize the stable-throughput region of the network.
- We study the stability of two known systems and we characterize the optimal resources which maximize the maximum stable-throughput region for each system.

Our theoretical reveal significant performance gains of the CSTR and NCNPQ systems over NCPQ system, and the significant improvement in performance of the CSTR system over NCNPQ system.

The rest of the paper is organized as follows. In the next section, we describe the system model considered in this paper. The stable-throughput regions of the proposed systems are considered in Section III. In Section IV we provide some numerical results, and finally, conclusions are drawn in Section V.

II. SYSTEM MODEL

We consider the cognitive relaying system depicted in Fig. 2, where a secondary (cognitive) user is utilizing the spectrum resource whenever the primary user is idle. We assume that the secondary transmitter will be able to sense the channel every time slot to check whether the primary user is idle or not. The cognitive system will be able to send a packet each time slot during the idle sessions of the primary user. The main assumptions of the system model at both the MAC and PHY layers are given in this section.

A. PHY Layer Assumptions

Denote the primary source as ps , the primary receiver as pd , the secondary source (transmitter) as ss , and the secondary receiver as sd . Let $h_{j,k}^t$ denotes the channel gain between node j and node k at instant t , where $j, k \in \{ss, sd, ps, pd\}$, and it is distributed according to a zero mean circularly symmetric complex Gaussian random variable with variance $\sigma_{j,k}^2$, i.e., $\mathcal{CN}(0, \sigma_{j,k}^2)$. Channel gains are independent and each link is perturbed by complex additive white Gaussian noise (AWGN) $z_{j,k}^t$ with zero mean and with variance N_o and independent for all links. In this paper, we consider multipacket reception (MPR) channel model which can capture the effect of interference, and fading at the PHY layer. Packets could survive the interference caused by concurrent transmissions if the received signal-to-interference and noise ratio (SINR) exceeds the threshold required for successful decoding at the receiver, i.e., for the link between node j and node k the probability of successful reception is given by $\overline{P}_{j,k}^c = \Pr\{\text{SINR} > \gamma_{th,k}\}$, where the superscript c denotes concurrent transmission event (see Appendix A). In case of no concurrent transmissions, successful transmission is achieved when the instantaneous signal to noise ratio (SNR) at the receiving node, employing the transmission power P_j , given by $|h_{j,k}^t|^2 \frac{P_j}{N_o}$, exceeds a predefined threshold $\gamma_{th,k}$, i.e., the receiver is assumed to be able to decode the received message with negligible probability of error. The signal received at a receiving node k from a transmitting node j at time t can be modeled as

$$y_{j,k}^t = h_{j,k}^t x_j^t + z_{j,k}^t \quad (1)$$

where x_j^t denotes the transmitted packet with average power P_j at time t . Given the channel model described above, the outage probability between node j and node k can be calculated as follows:

$$\begin{aligned} \Pr\{O_{j,k}\} = P_{j,k} &= \Pr\left\{|h_{j,k}^t|^2 P_j < N_o \gamma_{th,k}\right\} \\ &= 1 - e^{-\frac{\gamma_{th,k} N_o}{\sigma_{j,k}^2 P_j}} \end{aligned} \quad (2)$$

where $O_{j,k}$ is the event that the link between node j and node k is in outage. The SNR threshold $\gamma_{th,k}$ is a function of different factors in the communication system; it is a function of the application, the modulation, the signal processing applied at encoder/decoder sides, error-correction codes, and many other parameters [2]. For more details regarding MPR the reader is referred to [6], [10]–[13].

B. MAC Layer Assumptions

We assume that for the three systems the primary transmitter has a buffer Q_p to store the incoming traffic packets, while the secondary transmitter has two buffers, Q_s to store its own arrived traffic packets and Q_{ps} to store the fraction of the undelivered packets of the primary user. We assume all buffers are of infinite length. We consider time-slotted transmission where all packets have the same size and one time slot is sufficient for the transmission of a single packet. The arrival processes of the primary and the secondary transmitter are assumed to be independent Bernoulli processes with mean arrival rates λ_p and λ_s packet per time slot, respectively. Next we discuss the difference between the three systems.

1) *Cooperative Secondary Transmitter-Receiver System (CSTR)*: In this system the secondary transmitter will accept a fraction of the undelivered packets of the primary user, i.e., it will decide to accept a controllable fraction to be admitted to its relaying queue in case of outage on the primary channel using an adaptive admission control parameter f_s , and the secondary receiver has a buffer Q_{sd} to store undelivered packets of the primary user in order to accept a fraction f_{sd} of the undelivered packets of the primary user. We assume that for successfully decoded packets by the secondary transmitter and the secondary receiver the priority of keeping the packet is one of the optimization parameters of the system denoted by a binary value $\mathcal{P}$, i.e., $\mathcal{P} = 1$ if the priority is assigned to the secondary receiver, and $\mathcal{P} = 0$ if the priority is assigned to the secondary transmitter. We assume that the ACKs and NACKs messages initiated by the node with higher priority of keeping are sent earlier than the messages that are sent by the lower priority one, i.e., the node with priority of keeping transmits ACKs and NACKs from τ_1 to τ_2 within the time slot and the other node transmits from τ_2 to τ_3 . Note that the primary receiver sends the feedback messages over the period τ_o to τ_1 . The MAC layer is assumed to obey the following transmission scheme.

- Assigns the priority of keeping the packet to the secondary transmitter or the secondary receiver at the beginning of the transmissions.
- The primary transmits the packet at the head of its queue in its assigned time slot. If the queue is empty the time slot is free.
- If a packet is received successfully by either the primary receiver, the secondary transmitter, or the secondary receiver the packet is removed from the primary transmitter's queue (the secondary transmitter or the secondary receiver needs to send an ACK if a packet is not decoded correctly by the primary receiver in this case).
- If both the secondary transmitter and receiver decoded a packet correctly, the terminal which has the priority of keeping, will keep the packet and the packet will be removed from other node's buffer.
- If a packet is not received successfully by the primary receiver, the secondary transmitter, and the secondary receiver, the primary transmitter retransmits this packet in its next assigned time slot.
- At each sensed empty time slot, the secondary transmitter attempts to transmit a packet from its own queue with probability p_s , it retransmits a packet from the relaying queue with some probability p_{sp} , or it remains idle with probability p_i and the secondary receiver attempts to retransmit the undelivered packets of the primary user with probability p_{sd} , or to remain idle with probability $1 - p_{sd}$.
- Packets could survive the interference caused by concurrent transmissions between the secondary transmitter and the secondary receiver, if the SINR exceeds the threshold required for successful decoding at the receiver.

We assume that the overhead for transmitting the ACK and NACK messages is very small compared to packet sizes. The second assumption we make is that the errors and delay in packet acknowledgement feedback is negligible, which is reasonable for short length ACK/NACK packets as low rate codes can be employed in the feedback channel [2]. In addition, nodes cannot transmit and receive at the same time, these transmission constraints are common in network systems where terminals are equipped with single transceivers [6].

2) Non-cooperative Secondary Receiver with Priority (NCPQ) and with no Priority (NCPNQ):

In NCPQ and NCPNQ, the secondary transmitter is the only terminal that helps the primary user, it decides to accept a controllable fraction f_s of the undelivered packets of the primary user. The difference between NCPQ and NCPNQ is that during periods of silence of the primary user, in the NCPQ, a priority in transmission is given to the relaying queue, while in NCPNQ some access probabilities are assigned to the secondary transmitter's queues, i.e., secondary transmitter transmits a packet from queue Q_s with probability p_s and from the relaying queue Q_{ps} with probability p_{sp} . The MAC layer is assumed to operate according to the following operating rules.

- The primary transmits the packet at the head of its queue in its assigned time slot. If the queue is empty the time slot is free.
- If a packet is received successfully by either the primary receiver or the secondary transmitter, the packet is removed from the primary user's queue (the secondary transmitter needs to send an ACK if one is not heard by the primary receiver in this case).
- If a packet is not received successfully by both the primary receiver and the secondary transmitter, the primary transmitter retransmits this packet in its next assigned time slot.
- At each sensed empty time slot, the secondary transmitter retransmits a packet at the head of its queue either from its own queue or from the relaying queue.

III. STABILITY ANALYSIS OF THE SYSTEMS

A. CSTR

Let us denote the queue sizes of the transmitting terminals at any time instant t by Q_i^t , where i reads p for the primary transmitter's queue, s for secondary transmitter's queue, ps for the secondary transmitter's relaying queue, and sd for the secondary receiver's relaying queue. Then, Q_i^t evolves according to

$$Q_i^{t+1} = (Q_i^t - \mathcal{U}_i^t)^+ + \mathcal{A}_i^t \quad (3)$$

where $\mathcal{U}_i^t$ is the number of departures in time slot t . $\mathcal{A}_i^t$ denotes the number of arrivals in time slot t and is a stationary process by assumption with finite mean $\mathcal{E}\{\mathcal{A}_i^t\} = \lambda_i$. The function $(.)^+$ is defined as $(x)^+ = \max(x, 0)$. We assume that departures occur before arrivals, and the queue size is measured at the beginning of the time slot [2].

A fundamental performance measure of a communication network is the stability of its queues. We are interested in the queues size. More rigourously, stability can be defined as follows [2], [14].

Definition: Queue $i \in \{p, s, ps, sd\}$ is stable, if

$$\lim_{t \rightarrow \infty} \Pr\{Q_i^t < y\} = F(y) \text{ and } \lim_{y \rightarrow \infty} F(y) = 1 \quad (4)$$

If the arrival and service processes are strictly stationary, then we can apply Loynes's theorem to check for stability conditions [2], [15]. This theorem states that if the arrival process and the service process of a queue are strictly

stationary processes, and the average service rate is greater than the average arrival rate of the queue, then the queue is stable, otherwise the queue is unstable.

The service and arrival rates of the nodes are as follows. For terminal $i = p$, given that the priority factor $\mathcal{P} = 1$, i.e., the priority of keeping the packet is assigned to the secondary receiver, a packet can be served if either one of the four events is true: 1) The primary channel is in outage, the secondary receiver decides to accept the packet (with probability f_{sd}), and the channel $h_{ps,sd}^t$ is not in outage; 2) the primary channel is in outage, the secondary transmitter decides to accept the packet (which happens with probability f_s) and the secondary receiver decides not to accept the packet (which happens with probability $1 - f_{sd}$), and the associated link $h_{ps,ss}^t$ is not in outage; 3) the primary channel is in outage, the secondary transmitter and receiver both of them decide to accept the primary packet and both of them decode it correctly¹; or 4) if the channel between the primary source and primary receiver is not in outage, i.e., $\overline{O}_{ps,pd}^t$ is true². Due to the stationarity assumption of the channel gains, and using the outage probability formula (2), the probability of the event $\overline{O}_{ps,pd}^t$ is given by $\Pr\{\overline{O}_{ps,pd}^t\} = \overline{P}_{ps,pd}$. The service process can be modeled as

$$\mathcal{U}_p^t = \sum_{k=1}^4 1[A_k^t] \quad (5)$$

where $1[\cdot]$ denotes the indicator function, and A_k , for $k = \{1, 2, 3, 4\}$, are the events described above. From the above argument, it is clear that $\mathcal{U}_p^t$ is stationary process and has a finite mean:

$$\mathcal{E}\{\mathcal{U}_p^t\} = \mu_p = \overline{P}_{ps,pd} + P_{ps,pd} \left[f_{sd} \overline{P}_{ps,sd} + (1 - f_{sd} \overline{P}_{ps,sd}) f_s \overline{P}_{ps,ss} \right] \quad (6)$$

where $\mathcal{E}\{\cdot\}$ is the expected value. According to Loynes, stability of the queue i is given by:

$$\mu_i > \lambda_i. \quad (7)$$

Therefore the condition on the stability of queue p is given by:

$$\lambda_p < \overline{P}_{ps,pd} + P_{ps,pd} \left[f_{sd} \overline{P}_{ps,sd} + (1 - f_{sd} \overline{P}_{ps,sd}) f_s \overline{P}_{ps,ss} \right] \quad (8)$$

If we take the priority of keeping factor into account, the general formula of the average service rate of the primary transmitter is given by:

$$\begin{aligned} \mu_p &= \overline{P}_{ps,pd} + P_{ps,pd} \left[\mathcal{P} \left(f_{sd} \overline{P}_{ps,sd} + (1 - f_{sd} \overline{P}_{ps,sd}) f_s \overline{P}_{ps,ss} \right) \right. \\ &\quad \left. + \overline{\mathcal{P}} \left(f_s \overline{P}_{ps,ss} + (1 - f_s \overline{P}_{ps,ss}) f_{sd} \overline{P}_{ps,sd} \right) \right] \\ \mu_p &= \overline{P}_{ps,pd} + P_{ps,pd} \left[f_{sd} \overline{P}_{ps,sd} + f_s \overline{P}_{ps,ss} - f_s \overline{P}_{ps,ss} f_{sd} \overline{P}_{ps,sd} \right] \end{aligned} \quad (9)$$

¹The primary packet will be buffered to the secondary receiver queue and dropped from the secondary transmitter queue due to the priority of keeping assigned to the secondary receiver.

² $\overline{(\cdot)}$ denotes the complement of the event, i.e., $\overline{x} = 1 - x$.

It should be mentioned that μ_p is independent of $\mathcal{P}$. For terminal $i = s$, the service rate process can be modeled as

$$\mathcal{U}_s^t = 1 \left[\{Q_p^t = 0\} \cap A_s^t \cap \overline{\mathcal{O}}_{ss, sd}^t \cap \{Q_{sd}^t = 0\} \right] + 1 \left[\{Q_p^t = 0\} \cap A_s^t \cap \overline{\mathcal{O}}_{ss, sd}^t \cap \{Q_{sd}^t \neq 0\} \cap \overline{A}_{sd} \right] \quad (10)$$

where $\{Q_p^t = 0\}$ is the event that the primary queue is empty in time slot t , A_s^t denotes the event that in time slot t , the secondary transmitter assigned the channel to the relaying queue, i.e., the secondary transmitter will access the channel by the relaying queue (which happens with probability p_s), the secondary receiver is idle (which happens with probability $\overline{p}_{sd}$), $\overline{\mathcal{O}}_{ss, sd}^t$ denotes the complement of the outage event between secondary transmitter and secondary receiver, $\{Q_{sd}^t = 0\}$ is the event that the secondary receiver queue is empty, and $\overline{A}_{sd}$ is the event that the secondary receiver is idle. The probability that the primary terminal queue is empty is given by:

$$\Pr\{Q_p^t = 0\} = 1 - \frac{\lambda_p}{\mu_p}. \quad (11)$$

From the above argument, and the expression given in (11), it is clear that $\mathcal{U}_s^t$ is stationary process and has a finite mean:

$$\begin{aligned} \mathcal{E}\{\mathcal{U}_s^t\} &= \mu_s \\ &= \left(1 - \frac{\lambda_p}{\mu_p}\right) \overline{p}_{ss, sd} p_s \left[\Pr\{Q_{sd}^t = 0\} + \overline{p}_{sd} \Pr\{Q_{sd}^t \neq 0\} \right] \end{aligned} \quad (12)$$

According to Loynes the condition on the stability of the queue s is given by:

$$\lambda_s < \left(1 - \frac{\lambda_p}{\mu_p}\right) \overline{p}_{ss, sd} p_s \left[\Pr\{Q_{sd}^t = 0\} + \overline{p}_{sd} \Pr\{Q_{sd}^t \neq 0\} \right] \quad (13)$$

Consider now the relaying queue of the secondary transmitter Q_{ps} . Given that the queue of the primary user is empty in a time slot t , a packet from queue ps can be served in either one of the three following events: 1) If the secondary receiver is idle (which happens with probability $\overline{p}_{sd}$), and the channel between the secondary transmitter and the primary receiver is not in outage $\overline{\mathcal{O}}_{ss, pd}^t$; 2) if the secondary receiver accesses the channel (which happens with probability p_{sd}), and its queue is not empty, i.e., $Q_{sd}^t \neq 0$, and the complement of the event outage between the secondary transmitter and the primary receiver $\overline{\mathcal{O}}_{ss, pd}^t$ is true; or 3) if the queue sd in time slot t is not empty, the secondary receiver accesses the channel (which happens with probability p_{sd}), and the complement of the event outage between the secondary transmitter and the primary receiver $\overline{\mathcal{O}}_{ss, pd}^t | \mathcal{T}_{sd, pd}$. Mathematically, this can be modeled as:

$$\mathcal{U}_{ps}^t = \sum_{k=1}^3 1[E_k^t] \quad (14)$$

where E_k^t , for $k = \{1, 2, 3\}$, are the events described above. The expected value of the service process of the queue ps is given by:

$$\begin{aligned} \mathcal{E}\{\mathcal{U}_{ps}^t\} &= \mu_{ps} \\ &= \left[\left(\Pr\{Q_{sd}^t = 0\} + \overline{p}_{sd} \Pr\{Q_{sd}^t \neq 0\} \right) \overline{p}_{ss, pd} + p_{sd} \Pr\{Q_{sd}^t \neq 0\} \overline{p}_{ss, pd}^c \right] \left(1 - \frac{\lambda_p}{\mu_p}\right) p_{sp} \end{aligned} \quad (15)$$

Using Loynes conditions for stability and the expression of the outage probability in (2), the stability of the queue ps is given by:

$$\lambda_{ps} < (1 - \frac{\lambda_p}{\mu_p})p_{sp} \left[\left(\Pr\{Q_{sd}^t = 0\} + \bar{p}_{sd}\Pr\{Q_{sd}^t \neq 0\} \right) \bar{P}_{ss,pd} + p_{sd}\Pr\{Q_{sd}^t \neq 0\} \bar{P}_{ss,pd}^c \right] \quad (16)$$

Consider now the secondary receiver queue Q_{sd} . Given that the queue of the primary user is empty in time slot t , a packet from queue sd can be served if in a time slot t in either one of the six following events: 1) If the secondary receiver decides to access the channel (which occur with probability p_{sd}), the secondary transmitter has no packets in any of its queues, i.e., $Q_s^t = 0$ and $Q_{ps}^t = 0$, and the complement of the event outage between the secondary receiver and the primary receiver $\bar{O}_{sd,pd}^t$; 2) if the secondary receiver decides to access the channel, the event that the secondary transmitter's queues are $Q_{ps}^t \neq 0$ and $Q_s^t = 0$ and it does not access the channel (which happens with probability $\bar{p}_{sp}$), and the complement of the event outage between the secondary receiver and the primary receiver $\bar{O}_{sd,pd}^t$; 3) if the secondary receiver decides to access the channel, the event that the secondary transmitter's queues are $Q_{ps}^t = 0$ and $Q_s^t \neq 0$ and it is not accessing the channel (which happens with probability $\bar{p}_s$), and the complement of the event outage between the secondary receiver and the primary receiver $\bar{O}_{sd,pd}^t$; 4) if the secondary receiver decides to access the channel, the event that the secondary transmitter's queues are $Q_{ps}^t \neq 0$ and $Q_s^t \neq 0$ and it does not access the channel (which happens with probability $p_i = 1 - p_{sp} - p_s$), and the complement of the outage event between the secondary receiver and the primary receiver $\bar{O}_{sd,pd}^t$; 5) if the secondary receiver decides to access the channel, the event that the queue $Q_{ps}^t \neq 0$ and the secondary transmitter accesses the channel (with probability p_{sp}), and the complement of the outage event between the secondary receiver and the primary receiver given a transmission between the secondary transmitter and the primary receiver $\bar{O}_{sd,pd}^t | \mathcal{T}_{ss,pd}$; or 6) if the secondary receiver decides to access the channel, the event that the queue $Q_s^t \neq 0$ and the secondary transmitter accesses the channel (with probability p_s), and the complement of the outage event between the secondary receiver and the primary receiver given a transmission between the secondary transmitter and the secondary receiver $\bar{O}_{sd,pd}^t | \mathcal{T}_{ss,sd}$.

This can be modeled as:

$$U_{sd}^t = \sum_{k=1}^6 1[\mathcal{F}_k^t] \quad (17)$$

where $\mathcal{F}_k^t$, for $k = \{1, 2, \dots, 6\}$, are the events described above. The expected value of the service process of the queue sd is given by:

$$\begin{aligned} \mathcal{E}\{U_{sd}^t\} &= \mu_{sd} \\ &= (1 - \frac{\lambda_p}{\mu_p})p_{sd} \left[\left(\Pr\{Q_{ps}^t = 0, Q_s^t = 0\} + \bar{p}_{sp}\Pr\{Q_{ps}^t \neq 0, Q_s^t = 0\} + \bar{p}_s\Pr\{Q_{ps}^t = 0, Q_s^t \neq 0\} \right. \right. \\ &\quad \left. \left. + p_i\Pr\{Q_{ps}^t \neq 0, Q_s^t \neq 0\} \right) \bar{P}_{sd,pd} + (p_{sp}\Pr\{Q_{ps}^t \neq 0\} + p_s\Pr\{Q_s^t \neq 0\}) \bar{P}_{sd,pd}^c \right] \end{aligned} \quad (18)$$

The condition on the stability of the queue sd is given by:

$$\lambda_{sd} < \mu_{sd} \quad (19)$$

The arrival process to the queue ps can be described as follows. Given that $\mathcal{P} = 1$, the primary user's queue is not empty, i.e., $\{Q_p^t > 0\}$, the associated channel between the primary terminal-primary receiver is in outage, the secondary transmitter decides to accept the packet, and the channel between the primary transmitter and the secondary transmitter is not in outage, hence, the arrival to Q_{ps} is either one of the following events: 1) The event that the secondary receiver decides to accept the packet from the primary user, and the associated channel between the primary transmitter and the secondary receiver is in outage; or 2) if the secondary receiver decides not to accept the packet. The process is modeled as

$$\mathcal{A}_{ps}^t = \sum_{k=1}^2 \mathcal{W}_k \quad (20)$$

where $\mathcal{W}_k$'s are the events described above, and $\Pr\{Q_p^t > 0\} = \frac{\lambda_p}{\mu_p}$. The process is stationary and the expected value of the arrival process is expressed as

$$\lambda_{ps} = \frac{\lambda_p}{\mu_p} P_{ps,pd} (1 - f_{sd} \bar{P}_{ps,sd}) f_s \bar{P}_{ps,ss}. \quad (21)$$

Adding the priority factor, the mean arrival rate of the queue Q_{ps} is given by:

$$\lambda_{ps} = \frac{\lambda_p}{\mu_p} P_{ps,pd} \left(1 - \mathcal{P} f_{sd} \bar{P}_{ps,sd} \right) f_s \bar{P}_{ps,ss}. \quad (22)$$

The arrival process to the queue Q_{sd} can be described as follows. The event that the primary has packets, i.e., $\{Q_p^t > 0\}$, the secondary receiver decides to accept a packet from the primary user W_{sd}^t , the channel between the primary user and the secondary receiver is connected, and the associated channel to the primary terminal-primary receiver is in outage. The process can be modeled as

$$\mathcal{A}_{sd}^t = 1 \left[W_{sd}^t \cap \{Q_p^t > 0\} \cap O_{ps,pd}^t \cap \bar{O}_{ps,sd}^t \right]. \quad (23)$$

The process is stationary and the expected value of the arrival process to the queue Q_{sd} is expressed as

$$\mathcal{E}\{\mathcal{A}_{sd}^t\} = \lambda_{sd} = f_{sd} P_{ps,pd} \bar{P}_{ps,sd} \frac{\lambda_p}{\mu_p}. \quad (24)$$

If we involve $\mathcal{P}$, the mean arrival rate of the secondary receiver queue is given by:

$$\lambda_{sd} = \frac{\lambda_p}{\mu_p} P_{ps,pd} \left(1 - \bar{\mathcal{P}} f_s \bar{P}_{ps,ss} \right) f_{sd} \bar{P}_{ps,sd}. \quad (25)$$

Since the mean service rates at nodes s , ps and sd depend on each others queue size, these queues are called interacting queues, and consequently the rates of the individual departure processes cannot be computed directly. In order to overcome this problem, we utilize the idea of stochastic dominance [2], [6], [16], [17], which has been applied before to analyze interacting queues. Next, we discuss the stochastic dominance approach in order to obtain an inner bound on the stability region, then we construct two dominant systems, the inner bound on the stability of CSTR system is the union over the two dominant systems, and finally, we construct an outer bound on the stability region.

B. CSTR: Inner Bound

To analyze the stability of the systems queues we resort to a stochastic dominance approach. Analyzing the stability of interacting queues is a difficult problem that has been addressed for ALOHA systems initially in [16]–[18]. Also, it should be mentioned that characterizing the stable throughput region for interacting queues with terminals greater than three is still a complex open problem. The basic idea of the stochastic dominant system technique is to decouple the interaction between queues and thus renders the analysis possible and easier. Also, it permits the characterization of the stability region as union of the stability regions of two dominant systems. It is done by forcing a node to access the channel in a consistent manner even when its packet queue is empty by letting the node to transmit dummy packets. Specifically, transmitting dummy packets is only aimed to cause invariant (constant) interference to the other node regardless of the emptiness of the queue and not counted as an actual packet transmission, i.e., the dominant systems and the original system are identical, except that, the packets successfully transmitted are not removed from the terminal's queue.

In the stochastic dominance approach, we construct an appropriate hypothetical dominant system, which is a modification of the original system, that ensures that the queue sizes in the dominant system are, at all times, at least as large as those of the original system provided the queues start with identical initial conditions. Thus, the stability region of the new system **inner bounds** that of the original system. Furthermore, in the hypothetical system the queues are decoupled and not interacting anymore, thereby permitting the characterization of the stability region.

1) *First Dominant System* : Let us denote by $\mathcal{S}$ the CSTR system. In the first dominant system designated as $\mathcal{S}_1$, where Q_{sd} and Q_s send dummy packets when their queues empty, and the Q_{ps} behaves exactly as it would in the original system $\mathcal{S}$. Now, we can write down the service and arrival rates of the interacting queues, i.e., Q_s , Q_{ps} and Q_{sd} as follows

$$\mu_s = (1 - \frac{\lambda_p}{\mu_p})(1 - P_{ss,sd})p_s\bar{p}_{sd} \quad (26)$$

$$\mu_{ps} = (1 - \frac{\lambda_p}{\mu_p})p_{sp} \left[\bar{p}_{sd}\bar{P}_{ss,pd} + p_{sd}\bar{P}_{ss,pd}^c \right] \quad (27)$$

The probabilities $\Pr\{Q_s = 0\}$ and $\Pr\{Q_{ps} = 0\}$ are given by:

$$\Pr\{Q_s = 0\} = 1 - \frac{\lambda_s}{\mu_s} \quad (28)$$

$$\Pr\{Q_{ps} = 0\} = 1 - \frac{\lambda_{ps}}{\mu_{ps}} \quad (29)$$

$$\mu_{sd} = (1 - \frac{\lambda_p}{\mu_p})p_{sd} \left[\left(\bar{p}_s(1 - \frac{\lambda_{ps}}{\mu_{ps}}) + p_i \frac{\lambda_{ps}}{\mu_{ps}} \right) \bar{P}_{ps,sd} + (p_{sp} \frac{\lambda_{ps}}{\mu_{ps}} + p_s) \bar{P}_{ps,sd}^c \right] \quad (30)$$

According to the construction of the dominant system $\mathcal{S}_1$, it is easy to see that the queues of the dominant system are never less than those of the original system, provided they are both initialized identically (with the same initial conditions for queue sizes in both the original and dominant system). This is because, in the dominant system $\mathcal{S}_1$, the secondary receiver transmits dummy packets even if it does not have any packets in its queue, and therefore

interferes with secondary transmitter in all cases that it would in the original system. Therefore, given stability condition on the arrival rate for the queue Q_{sd} if for some (λ_p, λ_s) , the queues at all nodes are stable in the dominant system, then the corresponding queues in the original system must be stable. The portion of the stable-throughput region $\mathcal{R}(\mathcal{S}_1)$, which is based on $\mathcal{S}_1$ is given by the closure of the rate pairs (λ_p, λ_s) constrained by equations shown above as f_s, f_{sd}, p_s, p_{sp} , and p_{sd} vary over $[0, 1]$, and $\mathcal{P}$ varies over $\{0, 1\}$. This is essentially similar to the argument presented in [6], [17], and is applicable here as well. To obtain the closure of the rate pair, we utilize the constrained optimization technique. For a fixed λ_p , the maximum stable arrival rate to the secondary transmitter's queue is given by the following optimization problem (as in [2], [6]):

$$\begin{aligned} \max_{p_s, p_{sp}, p_{pd}, f_s, f_{sd}, \mathcal{P}} \quad & \lambda_s = \mu_s \\ \text{s.t.} \quad & 0 \leq p_s, p_{sp}, p_{sd}, f_s, f_{sd} \leq 1, \mathcal{P} \in \{0, 1\}, p_s + p_{sp} \leq 1 \\ & \lambda_p \leq \mu_p, \lambda_{ps} \leq \mu_{ps}, \lambda_{sd} \leq \mu_{sd}. \end{aligned} \quad (31)$$

2) Second Dominant System: The second dominant system is designated as $\mathcal{S}_2$, where the secondary transmitter is the one that send dummy packets when any or both its queues are empty, and the secondary receiver behaves exactly as it is in the original system $\mathcal{S}$. The service rates of the system's queues are given by:

$$\mu_{sd} = (1 - \frac{\lambda_p}{\mu_p}) p_{sd} \left[p_i \bar{P}_{ps, sd} + (p_{sp} + p_s) \bar{P}_{ps, sd}^c \right]. \quad (32)$$

The probability that queue Q_{sd} is empty is given by:

$$\Pr\{Q_{sd} = 0\} = 1 - \frac{\lambda_{sd}}{\mu_{sd}}. \quad (33)$$

$$\begin{aligned} \mu_s &= (1 - \frac{\lambda_p}{\mu_p}) \bar{P}_{ss, sd} p_s \left[1 - p_{sd} \frac{\lambda_{sd}}{\mu_{sd}} \right] \\ \mu_{ps} &= (1 - \frac{\lambda_p}{\mu_p}) p_{sp} \left[(1 - p_{sd} \frac{\lambda_{sd}}{\mu_{sd}}) \bar{P}_{ss, pd} + p_{sd} \frac{\lambda_{sd}}{\mu_{sd}} \bar{P}_{ss, pd}^c \right] \end{aligned} \quad (34)$$

Based on the construction of the dominant system $\mathcal{S}_2$, it is trivial to notice that the queues of the dominant system are never less than those of the original system, provided they are both initialized identically. This is because, in the dominant system $\mathcal{S}_2$, the secondary transmitter s transmits dummy packets even if it does not have any packets in its queues (transmits a dummy packet from queue Q_s with probability p_s and from the relaying queue Q_{ps} with probability p_{sp}), and therefore interferes with secondary receiver in all cases that it would in the original system. Therefore, given stability condition on the arrival rates of the queues (Q_{sd}, Q_{ps}) , if for each mean arrival rates pair (λ_p, λ_s) the queues at all nodes are stable in the dominant system, then the corresponding queues in the original system must be stable. The second inner bound for the stable-throughput region of the CSTR system, $\mathcal{R}(\mathcal{S}_2)$, which is based on the dominant system $\mathcal{S}_2$ can be obtained by formulating a constrained optimization problem similar to that discussed above for the CSTR system, where we fix λ_p and maximize λ_s as f_s, f_{ps}, p_s, p_{sp} and p_{sd} vary over $[0, 1]$ and $\mathcal{P}$ varies over $\{0, 1\}$. The maximum stable-throughput of both dominant systems is depicted in Fig.

3. We used the following set of outage probabilities $P_{ps,pd} = 0.4$, $P_{ss,sd} = 0.2$, $P_{ps,ss} = 0.08$, $P_{ss,pd} = 0.08$, $P_{sd,pd} = 0.02$, and $P_{ps,sd} = 0.02$. The optimization problems of the first and second dominant systems are solved numerically using MatLab optimization toolbox. Since the problems are nonconvex, the solver produces a locally optimum solution. To increase the likelihood of obtaining the global optimum, the program is run many times, say 10000 times, with different initializations of the optimization variables.

C. CSTR: Outer Bound

Here we provide two outer bounds for CSTR.

1) *First Outer Bound*: An outer bound for the CSTR can be obtained by using the following identities [19]:

$$\Pr\{Q_{sd}^t = 0\} + \bar{p}_{sd}\Pr\{Q_{sd}^t \neq 0\} \leq \Pr\{Q_{sd}^t = 0\} + \Pr\{Q_{sd}^t \neq 0\} = 1. \quad (35)$$

And

$$\left(\Pr\{Q_{sd}^t = 0\} + \bar{p}_{sd}\Pr\{Q_{sd}^t \neq 0\}\right)\bar{P}_{ss,pd} + p_{sd}\Pr\{Q_{sd}^t \neq 0\}\bar{P}_{ss,pd}^c \leq \bar{P}_{ss,pd}.$$

In addition, based on Bayes' theorem

$$\Pr\{a, b\} = \Pr\{a|b\}\Pr\{b\} \leq \Pr\{b\} \quad \text{or} \quad \Pr\{a, b\} = \Pr\{b|a\}\Pr\{a\} \leq \Pr\{a\} \quad (36)$$

where a and b are two event. Thus, we can upper bound the following quantities:

$$\begin{aligned} \Pr\{Q_{ps}^t = 0, Q_s^t = 0\} &\leq \Pr\{Q_{ps}^t = 0\}, \quad \Pr\{Q_{ps}^t \neq 0, Q_s^t = 0\} \leq \Pr\{Q_{ps}^t \neq 0\}, \\ \Pr\{Q_{ps}^t = 0, Q_s^t \neq 0\} &\leq \Pr\{Q_{ps}^t = 0\}, \quad \Pr\{Q_{ps}^t \neq 0, Q_s^t \neq 0\} \leq \Pr\{Q_{ps}^t \neq 0\} \end{aligned} \quad (37)$$

The mean service rates of the queues can be upper bound as follows

$$\mu_s \leq \left(1 - \frac{\lambda_p}{\mu_p}\right)\bar{P}_{ss,sd}p_s \quad (38)$$

$$\mu_{ps} \leq \left(1 - \frac{\lambda_p}{\mu_p}\right)p_{sp}\bar{P}_{ss,pd} \quad (39)$$

Therefore, the service rate of the queue Q_{sd} is given by:

$$\mu_{sd} \leq \left(1 - \frac{\lambda_p}{\mu_p}\right)p_{sd} \left[\left(\left(1 - \frac{\lambda_{ps}}{\mu_{ps}}\right) + \bar{p}_{sp} \frac{\lambda_{ps}}{\mu_{ps}} + \bar{p}_s \left(1 - \frac{\lambda_{ps}}{\mu_{ps}}\right) + p_i \frac{\lambda_{ps}}{\mu_{ps}} \right) \bar{P}_{ps,sd} + \left(p_{sp} \frac{\lambda_{ps}}{\mu_{ps}} + p_s \right) \bar{P}_{ps,sd}^c \right]. \quad (40)$$

When the inequalities hold, the queues are not interacting anymore, therefore, we can obtain the outer bound by solving a constrained optimization problem to get the closure (λ_p, λ_s) . The optimization problem is given by:

$$\begin{aligned} \max_{p_s, p_{sp}, p_{pd}, f_s, f_{sd}, \mathcal{P}} \quad & \lambda_s = \left(1 - \frac{\lambda_p}{\mu_p}\right)\bar{P}_{ss,sd}p_s. \\ \text{s.t.} \quad & 0 \leq p_s, p_{sp}, p_{sd}, f_s, f_{sd} \leq 1, \quad \mathcal{P} \in \{0, 1\}, \quad p_s + p_{sp} \leq 1. \\ & \lambda_p \leq \mu_p, \lambda_{ps} \leq \mu_{ps}, \lambda_{sd} \leq \mu_{sd}. \end{aligned} \quad (41)$$

Denote the first outer bound as $\mathcal{S}_1^{(o)}$, the outer bound can be specified by the rates pair

$$\mathcal{R}(\mathcal{S}_1^{(o)}) = \left\{ (\lambda_p, \lambda_s) : \lambda_s < \left(1 - \frac{\lambda_p}{\bar{P}_{ps,pd} + P_{ps,pd} \left[f_{sd}^* \bar{P}_{ps,sd} + (1 - f_{sd}^* \bar{P}_{ps,sd}) f_s^* \bar{P}_{ps,ss} \right]} \right) \bar{P}_{ss,sd} p_s^* \right\}. \quad (42)$$

where p_s^* , p_{sp}^* , p_{pd}^* , f_s^* , f_{sd}^* and $\mathcal{P}^*$ are obtained by solving (41).

2) *Second Outer Bound:* Another outer bound which can be addressed analytically is obtained as follows.

Using (9):

$$\mu_p = \bar{P}_{ps,pd} + P_{ps,pd} \left[f_{sd} \bar{P}_{ps,sd} + f_s \bar{P}_{ps,ss} - f_s \bar{P}_{ps,ss} f_{sd} \bar{P}_{ps,sd} \right] \leq \bar{P}_{ps,pd} + P_{ps,pd} \max \left\{ \bar{P}_{ps,sd}, \bar{P}_{ps,ss} \right\} \quad (43)$$

$$\mu_s \leq \left(1 - \frac{\lambda_p}{\mu_p}\right) \bar{P}_{ss,sd} p_s \leq \left(1 - \frac{\lambda_p}{\mu_p}\right) \bar{P}_{ss,sd} \quad (44)$$

when the inequality (43) holds and applying Loynes's law

$$\lambda_s < \mu_s \leq \left(1 - \frac{\lambda_p}{\bar{P}_{ps,pd} + P_{ps,pd} \max \left\{ \bar{P}_{ps,sd}, \bar{P}_{ps,ss} \right\}}\right) \bar{P}_{ss,sd} \quad (45)$$

$$\lambda_s < \left(1 - \frac{\lambda_p}{\bar{P}_{ps,pd} + P_{ps,pd} \max \left\{ \bar{P}_{ps,sd}, \bar{P}_{ps,ss} \right\}}\right) \bar{P}_{ss,sd} \quad (46)$$

Denote the second outer bound as $\mathcal{S}_2^{(o)}$, the outer bound can be specified by the rates pair

$$\mathcal{R}(\mathcal{S}_2^{(o)}) = \left\{ (\lambda_p, \lambda_s) : \frac{\lambda_s}{\bar{P}_{ss,sd}} + \frac{\lambda_p}{\bar{P}_{ps,pd} + P_{ps,pd} \max \left\{ \bar{P}_{ps,sd}, \bar{P}_{ps,ss} \right\}} < 1 \right\}. \quad (47)$$

The outer bound, $\mathcal{S}^{(o)}$, of the CSTR is the intersection of the two outer bounds, i.e., $\mathcal{R}(\mathcal{S}^{(o)}) = \mathcal{R}(\mathcal{S}_1^{(o)}) \cap \mathcal{R}(\mathcal{S}_2^{(o)})$.

Note that $\mathcal{R}(\mathcal{S}_1^{(o)})$ is contained inside $\mathcal{R}(\mathcal{S}_2^{(o)})$, i.e., $\mathcal{R}(\mathcal{S}_1^{(o)}) \cap \mathcal{R}(\mathcal{S}_2^{(o)}) = \mathcal{R}(\mathcal{S}_1^{(o)})$. The inner and the outer bounds of the CSTR are depicted in Fig. 4.

D. NCNPQ

In this subsection, we investigate the stability region of a cooperative cognitive user with no priority assigned to the relaying queue and with adaptive acceptance factor. The secondary transmitter will use the idle time slots of the primary user to transmit a packet from the relaying queue with probability p_{sp} or to transmit a packet from its own traffic with probability $p_s = 1 - p_{sp}$. The arrival and service rates of each node are given by:

$$\mu_p = \bar{P}_{ps,pd} + f_s P_{ps,pd} \bar{P}_{ps,ss} \quad (48)$$

$$\lambda_{ps} = f_s P_{ps,pd} \bar{P}_{ps,ss} \frac{\lambda_p}{\mu_p} \quad (49)$$

$$\mu_{ps} = p_{sp} \left(1 - \frac{\lambda_p}{\mu_p}\right) \bar{P}_{ss,pd} \quad (50)$$

$$\mu_s = p_s \left(1 - \frac{\lambda_p}{\mu_p}\right) \bar{P}_{ss,sd}. \quad (51)$$

The closure of the pair of arrival rates (λ_p, λ_s) , where we fix λ_p and maximize λ_s as f_s and p_s vary over $[0, 1]$. The stable-throughput region of the system can be obtained by formulating a constrained optimization problem similar to that discussed above for the CSTR system. The optimization problem is expressed as:

$$\begin{aligned}
\max_{f_s, p_s} \quad & \lambda_s = p_s \left(1 - \frac{\lambda_p}{\mu_p}\right) \bar{P}_{ss, sd} \\
\text{s.t.} \quad & \lambda_p \leq \mu_p \\
& 0 \leq f_s \leq 1, 0 \leq p_s \leq 1 \\
& \lambda_{ps} \leq \mu_{ps}
\end{aligned} \tag{52}$$

Arranging the above optimization problem as follows:

$$\begin{aligned}
\max_{f_s, p_s} \quad & \frac{p_s (\bar{P}_{ps, pd} + f_s K - \lambda_p)}{\bar{P}_{ps, pd} + f_s K}, \\
\text{s.t.} \quad & -f_s K \leq \bar{P}_{ps, pd} - \lambda_p \\
& 0 \leq f_s \leq 1, 0 \leq p_s \leq 1 \\
& \frac{f_s}{\bar{P}_{ps, pd} + f_s K - \lambda_p} + p_s \frac{\bar{P}_{ss, pd}}{K \lambda_p} \leq \frac{\bar{P}_{ss, pd}}{K \lambda_p}
\end{aligned} \tag{53}$$

where $K = P_{ps, pd} \bar{P}_{ps, ss}$. The optimization problem is non-convex. It can be solved via a one-dimensional grid search over the optimal value of f_s . Fixing f_s , we have the following optimization problem:

$$\begin{aligned}
\max_{p_s} \quad & p_s \\
\text{s.t.} \quad & f_s \geq \frac{\lambda_p - \bar{P}_{ps, pd}}{K} \\
& 0 \leq f_s \leq 1, 0 \leq p_s \leq 1 \\
& p_s \leq 1 - \frac{f_s}{\bar{P}_{ps, pd} + f_s K - \lambda_p} \frac{K \lambda_p}{\bar{P}_{ss, pd}}
\end{aligned} \tag{54}$$

The optimization problem is **convex** and can be readily solved. The optimal value of p_s is given by:

$$p_s^* = 1 - \frac{f_s}{\bar{P}_{ps, pd} + f_s K - \lambda_p} \frac{K \lambda_p}{\bar{P}_{ss, pd}} \tag{55}$$

$$p_{sp}^* = \frac{f_s}{\bar{P}_{ps, pd} + f_s K - \lambda_p} \frac{K \lambda_p}{\bar{P}_{ss, pd}} \tag{56}$$

The stability of the NCNPQ system is given by:

$$\mathcal{R}(\text{NCNPQ}) = \left\{ (\lambda_p, \lambda_s) : \lambda_s < p_s^* \left(1 - \frac{\lambda_p}{\bar{P}_{ps, pd} + f_s^* P_{ps, pd} \bar{P}_{ps, ss}} \right) \bar{P}_{ss, sd} \right\}. \tag{57}$$

The optimal values are drawn in Fig. 5.

E. NCPQ

In this subsection, we investigate the stability region of NCPQ. The service and arrival rates of each queue in the system is given by [5]:

$$\mu_p = \bar{P}_{ps,pd} + f_s P_{ps,pd} \bar{P}_{ps,ss} \quad (58)$$

$$\lambda_{ps} = f_s P_{ps,pd} \bar{P}_{ps,ss} \frac{\lambda_p}{\mu_p} \quad (59)$$

$$\mu_{ps} = (1 - \frac{\lambda_p}{\mu_p}) \bar{P}_{ss,pd} \quad (60)$$

$$\mu_s = (1 - \frac{\lambda_p}{\mu_p})(1 - \frac{\lambda_{ps}}{\mu_{ps}}) \bar{P}_{ss,sd}. \quad (61)$$

Stable-throughput region of the system can be obtained by formulating a constrained optimization problem similar to that discussed above for the CSTR system, where we fix λ_p and maximize λ_s as f_s varies over $[0, 1]$.

$$\begin{aligned} \max_{f_s} \quad & \lambda_s = (1 - \frac{\lambda_p}{\mu_p})(1 - \frac{\lambda_{ps}}{\mu_{ps}}) \bar{P}_{ss,sd} \\ \text{s.t.} \quad & \lambda_p \leq \mu_p \\ & 0 \leq f_s \leq 1 \\ & \lambda_{ps} \leq \mu_{ps} \end{aligned} \quad (62)$$

After some mathematical manipulation the optimization problem reduces to:

$$\begin{aligned} \min_{f_s} \quad & \frac{1 + f_s \frac{K}{\bar{P}_{ss,pd}}}{1 + f_s \frac{K}{\bar{P}_{ps,pd}}} \\ \text{s.t.} \quad & f_s \geq \frac{\lambda_p - \bar{P}_{ps,pd}}{K} \\ & 0 \leq f_s \leq 1 \\ & f_s(\lambda_p - \bar{P}_{ss,pd}) \leq (\bar{P}_{ps,pd} - \lambda_p) \frac{\bar{P}_{ss,pd}}{K} \end{aligned} \quad (63)$$

The constraints in the above optimization problem are linear. However, the objective function is not convex. Nevertheless, it is linear fractional, and hence, quasi-convex (quasilinear) [20]. The bisection algorithm can be employed to solve this kind of optimization problems iteratively by posing it as a sequence of feasibility problems where each problem is a linear program. In our case, it can be readily solved as in Appendix B. It can be noted that if $\bar{P}_{ss,pd} = \bar{P}_{ps,pd}$ the above optimization problem will be reduced to a feasibility problem [20].

The optimal value of the acceptance factor f_s according to the channel quality between of the primary link and primary-secondary link is given by:

- If $\bar{P}_{ps,pd} < \bar{P}_{ss,pd}$

$$f_s^* = \begin{cases} [0, 1] & \text{if } \lambda_p = 0; \\ 1 & \text{if } 0 < \lambda_p \leq \bar{P}_{ss,pd}. \end{cases}$$

- If $\bar{P}_{ps,pd} > \bar{P}_{ss,pd}$

$$f_s^* = \begin{cases} [0, 1] & \text{if } \lambda_p = 0; \\ 0 & \text{if } 0 < \lambda_p \leq \bar{P}_{ps,pd}. \end{cases}$$

- If $\bar{P}_{ps,pd} = \bar{P}_{ss,pd}$

The problem is reduced to a feasibility problem. However, we will obtain set of fractions f_s that satisfy the domain of the objective function and the constraints. Thus the optimal set of f_s is given by:

$$f_s^* = [0, 1] \quad (64)$$

Proof: See Appendix B. ■

Therefore, the secondary transmitter according to the **channels quality** will choose the optimal value of the admitting factor f_s .

The stability region of the NCPQ system is given by:

$$\mathcal{R}(\text{NCPQ}) = \left\{ (\lambda_p, \lambda_s) : \lambda_s < \left(1 - \frac{\lambda_p}{\bar{P}_{ps,pd} + f_s^* K}\right) \left(1 - \frac{K}{\bar{P}_{ss,pd}} \frac{f_s^* \lambda_p}{\bar{P}_{ps,pd} + f_s^* K - \lambda_p}\right) \bar{P}_{ss,sd} \right\}. \quad (65)$$

Proposition 1. *The stability region of NCPQ is contained inside that of CSTR and NCNPQ. In other words*

$$\mathcal{R}(\text{NCPQ}) \subseteq \mathcal{R}(\text{NCNPQ}) \subseteq \mathcal{R}(\text{CSTR}) \quad (66)$$

Proof: Since the NCPQ is achievable by the CSTR and NCNPQ system via controlling the optimization parameters (setting some of them to zero), therefore, its stability is achievable and contained inside both of them. On the other hand, NCNPQ is achievable by the CSTR via controlling the optimization parameters, hence its stability is contained inside CSTR. ■

Next, we provide some numerical results to reveal the above proposition.

IV. NUMERICAL RESULTS

In this section we provide the solution of the optimization problem considered in this paper. A comparison between the proposed systems is depicted in Figs. 6 and 8 for different values of outage events and probability of reception in case of concurrent transmissions. The corresponding optimal values of the optimization parameters for the CSTR are drawn in Figs. 7 and 9, respectively. It should be mentioned that if the link of the primary is always in outage with probability 1, i.e., there is no direct link between the primary transmitter and receiver (the primary user's packets will never be served if there is no cooperation, i.e., $\mu_p = \bar{P}_{ps,pd} = 0$) and/or the link between the primary receiver and the secondary transmitter is in outage most of the time, the CSTR performance will significantly overcome the maximum stable throughput of the NCPQ and NCNPQ systems. This remark can be seen in Figs. 10 and 11. The optimal values for CSTR to achieve the boundary of Fig. 11 are depicted in Fig. 12, respectively. The mean arrival rate of the secondary transmitter is a monotonic decreasing function with the mean

arrival rate of the primary transmitter, λ_p . This is because as the the primary arrival rate increases the probability of the primary queue to be empty vanishes and the secondary queue will not be able to access the channel.

V. CONCLUSION

In this paper, we have addressed the impact of cooperative cognitive system at the multiple-access layer. We investigated the maximum stable-throughput of three systems, i.e., CSTR, NCPQ, and NCNPQ systems. In CSTR, the cognitive system (transmitter and receiver) senses the channel for idle channel resources and exploits them to relay the undelivered packets of the primary user or to use the channel resources to serve its own traffic. In NCNPQ, the secondary transmitter uses the silence periods of the primary user to serve a packet from one of its queues. In NCPQ, the secondary transmitter assigned higher priority to the relaying queue, if the relaying queue is empty, it transmits a packet from its own queue. The results reveal the significant performance of CSTR and NCNPQ systems over NCPQ. The maximum stable-throughput of the NCPQ is a subset of the maximum stable-throughput of NCNPQ, and the maximum stable-throughput of the NCNPQ is a subset of the maximum stable-throughput of the CSTR system.

APPENDIX A

The outage probability between terminal i and terminal j given that there is a transmission between terminal k and terminal j [3], [6] is given by:

$$\begin{aligned} P_{i,j}^c = \Pr\{O_{i,j}|\mathcal{T}_{k,j}\} &= \Pr\left\{\frac{P_i|h_{i,j}|^2}{P_k|h_{k,j}|^2 + N_o} \leq \gamma_{th,j}\right\} \\ &= 1 - \frac{1}{1 + \frac{P_k\gamma_{th,j}}{P_i} \frac{\sigma_{k,j}^2}{\sigma_{i,j}^2}} e^{-\frac{\gamma_{th,j}N_o}{P_i\sigma_{i,j}^2}} \end{aligned}$$

where $\{\mathcal{T}_{k,j}\}$ is the event that the terminal k is transmitting a packet to terminal j . One can obtain a relationship between the two events $\{O_{i,j}|\mathcal{T}_{k,j}\}$ and $\{O_{i,j}\}$ as follows:

$$\overline{P}_{i,j}^c = \frac{\overline{P}_{i,j}}{1 + \frac{P_k\gamma_{th,j}}{P_i} \frac{\sigma_{k,j}^2}{\sigma_{i,j}^2}} \stackrel{(e)}{\leq} \overline{P}_{i,j} \quad (67)$$

where the inequality of (e) holds to equality if $P_k = 0$, i.e., no concurrent transmission.

APPENDIX B

In this Appendix, we provide the solution of the following optimization problem:

$$\begin{aligned} \min_x \quad & \frac{1 + x\beta_1}{1 + x\beta_2} \\ \text{s.t.} \quad & x \geq c \\ & x \leq d \end{aligned} \quad (68)$$

where c, d, β_1 and β_2 are constants. If $\beta_1 > \beta_2$, then to minimize the objective function we need to choose the lowest value of x , i.e., $x = c$. If $\beta_1 < \beta_2$, then to minimize the objective function we need to choose the highest value of x , i.e., $x = d$. On the other hand, $\beta_1 = \beta_2$, the optimization problem reduces to:

$$\begin{aligned} \min_x \quad & 1 \\ \text{s.t.} \quad & x \geq c \\ & x \leq d \end{aligned} \tag{69}$$

which is a feasibility problem. The optimal set is $x^* = [c, d]$.

ACKNOWLEDGEMENT

This research work is funded by Qatar National Research Fund (QNRF) under grant number NPRP 09-1168-2-445.

REFERENCES

- [1] S. Haykin, "Cognitive radio: brain-empowered wireless communications," *IEEE Journal on Selected Areas in Communications*, vol. 23, no. 2, pp. 201–220, Feb. 2005.
- [2] A. Sadek, K. Liu, and A. Ephremides, "Cognitive multiple access via cooperation: protocol design and performance analysis," *IEEE Transactions on Information Theory*, vol. 53, no. 10, pp. 3677–3696, Oct. 2007.
- [3] O. Simeone, Y. Bar-Ness, and U. Spagnolini, "Stable throughput of cognitive radios with and without relaying capability," *IEEE Transactions on Communications*, vol. 55, no. 12, pp. 2351–2360, Dec. 2007.
- [4] J. Gambini, O. Simeone, and U. Spagnolini, "Cognitive relaying and opportunistic spectrum sensing in unlicensed multiple access channels," in *IEEE 10th International Symposium on Spread Spectrum Techniques and Applications ISSSTA*. IEEE, 2008, pp. 371–375.
- [5] M. Elsaadany, M. Abdallah, T. Khattab, M. Khairy, and M. Hasna, "Cognitive relaying in wireless sensor networks: Performance analysis and optimization," in *IEEE Global Telecommunications Conference GLOBECOM*, Dec. 2010, pp. 1–6.
- [6] S. Kompella, G. Nguyen, J. Wieselthier, and A. Ephremides, "Stable throughput tradeoffs in cognitive shared channels with cooperative relaying," in *Proceedings IEEE INFOCOM*, Apr. 2011, pp. 1961–1969.
- [7] I. Krikidis, J. Laneman, J. Thompson, and S. McLaughlin, "Protocol design and throughput analysis for multi-user cognitive cooperative systems," *IEEE Transactions on Wireless Communications*, vol. 8, no. 9, pp. 4740–4751, 2009.
- [8] I. Krikidis, N. Devroye, and J. Thompson, "Stability analysis for cognitive radio with multi-access primary transmission," *IEEE Transactions on Wireless Communications*, vol. 9, no. 1, pp. 72–77, 2010.
- [9] X. Bao, P. Martins, T. Song, and L. Shen, "Stable throughput analysis of multi-user cognitive cooperative systems," in *IEEE Global Telecommunications Conference GLOBECOM 2010*,. IEEE, 2010, pp. 1–5.
- [10] S. Ghez, S. Verdu, and S. Schwartz, "Stability properties of slotted aloha with multipacket reception capability," *IEEE Transactions on Automatic Control*, vol. 33, no. 7, pp. 640–649, 1988.
- [11] S. Ghez, S. Verdú, and S. Schwartz, "Optimal decentralized control in the random access multipacket channel," *IEEE Transactions on Automatic Control*, vol. 34, no. 11, pp. 1153–1163, 1989.

- [12] V. Naware, G. Mergen, and L. Tong, "Stability and delay of finite-user slotted ALOHA with multipacket reception," *IEEE Transactions on Information Theory*, vol. 51, no. 7, pp. 2636–2656, July 2005.
- [13] B. Shrader and A. Ephremides, "Random access broadcast: stability and throughput analysis," *IEEE Transactions on Information Theory*, vol. 53, no. 8, pp. 2915–2921, 2007.
- [14] W. Szpankowski, "Stability conditions for some distributed systems: buffered random access systems," *Advances in Applied Probability*, pp. 498–515, 1994.
- [15] R. Loynes, "The stability of a queue with non-independent inter-arrival and service times," in *Proc. Cambridge Philos. Soc*, vol. 58, no. 3. Cambridge University Press, 1962, pp. 497–520.
- [16] W. Luo and A. Ephremides, "Stability of N interacting queues in random-access systems," *IEEE Transactions on Information Theory*, vol. 45, no. 5, pp. 1579–1587, Jul. 1999.
- [17] R. Rao and A. Ephremides, "On the stability of interacting queues in a multiple-access system," *IEEE Transactions on Information Theory*, vol. 34, no. 5, pp. 918–930, Sep. 1988.
- [18] B. Tsybakov and W. Mikhailov, "Ergodicity of slotted ALOHA system," *Problemy Peredachi Informatsii*, vol. 15, no. 4, pp. 73–87, 1979.
- [19] A. El Shafie and A. Sultan, "Cooperative cognitive relaying with ordered cognitive multiple access," in *Globecom 2012 - Cognitive Radio and Networks Symposium (GC12 CogRN)*, Anaheim, CA, USA, Dec. 2012.
- [20] S. Boyd and L. Vandenberghe, *Convex optimization*. Cambridge University Press, 2004.

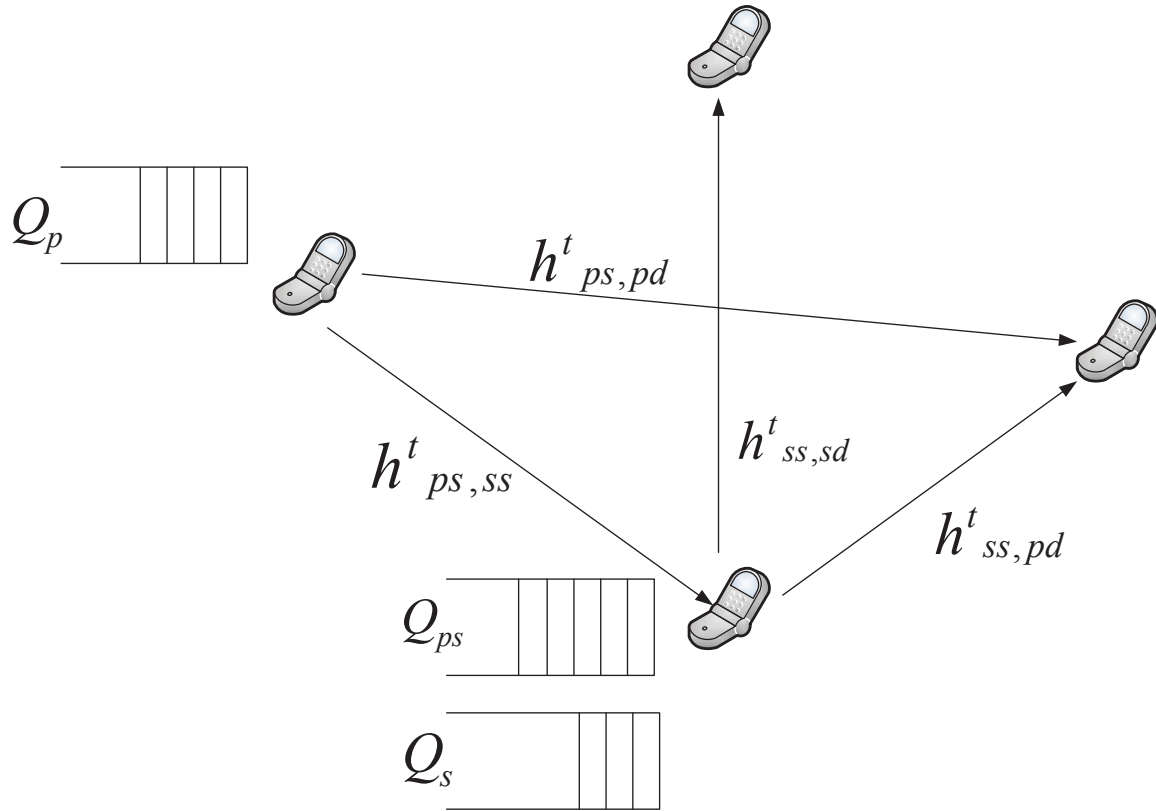


Fig. 1. Primary and secondary links of the NCPQ system and NCNPQ.

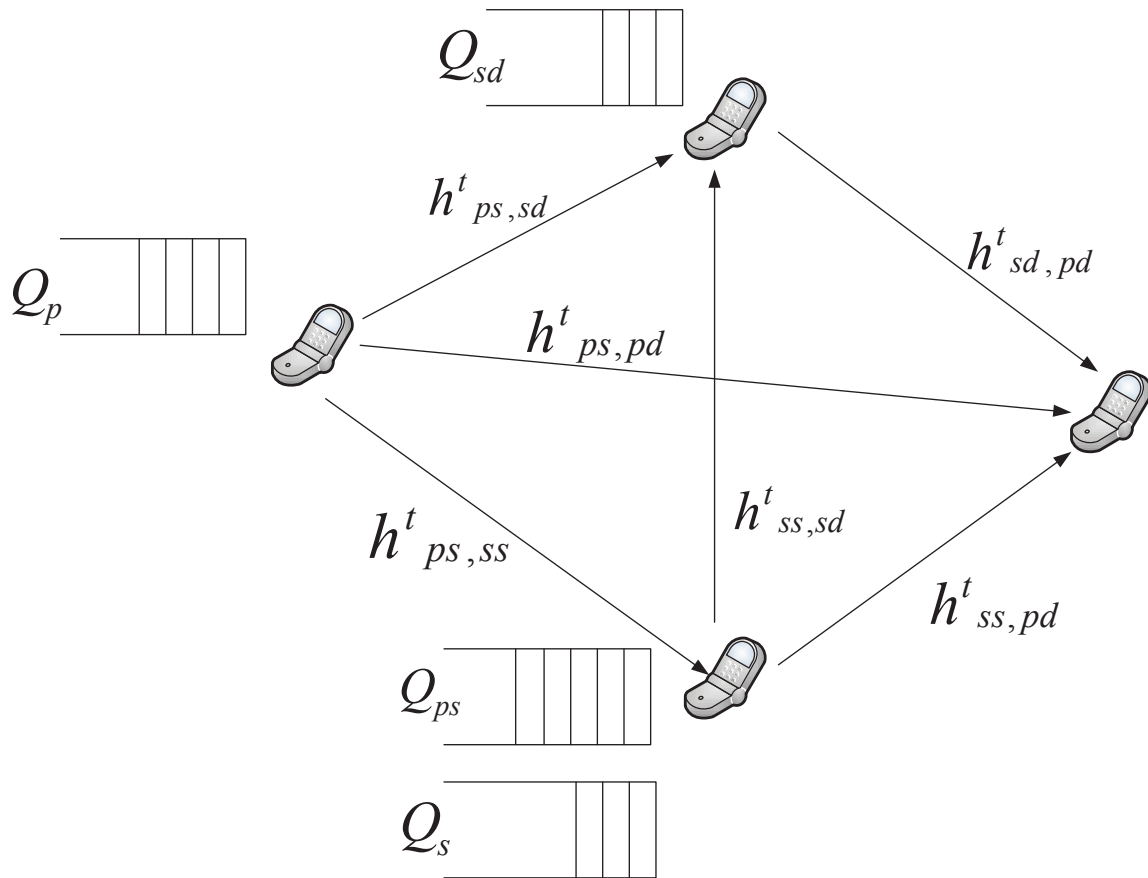


Fig. 2. Novel scheme (secondary and primary links).

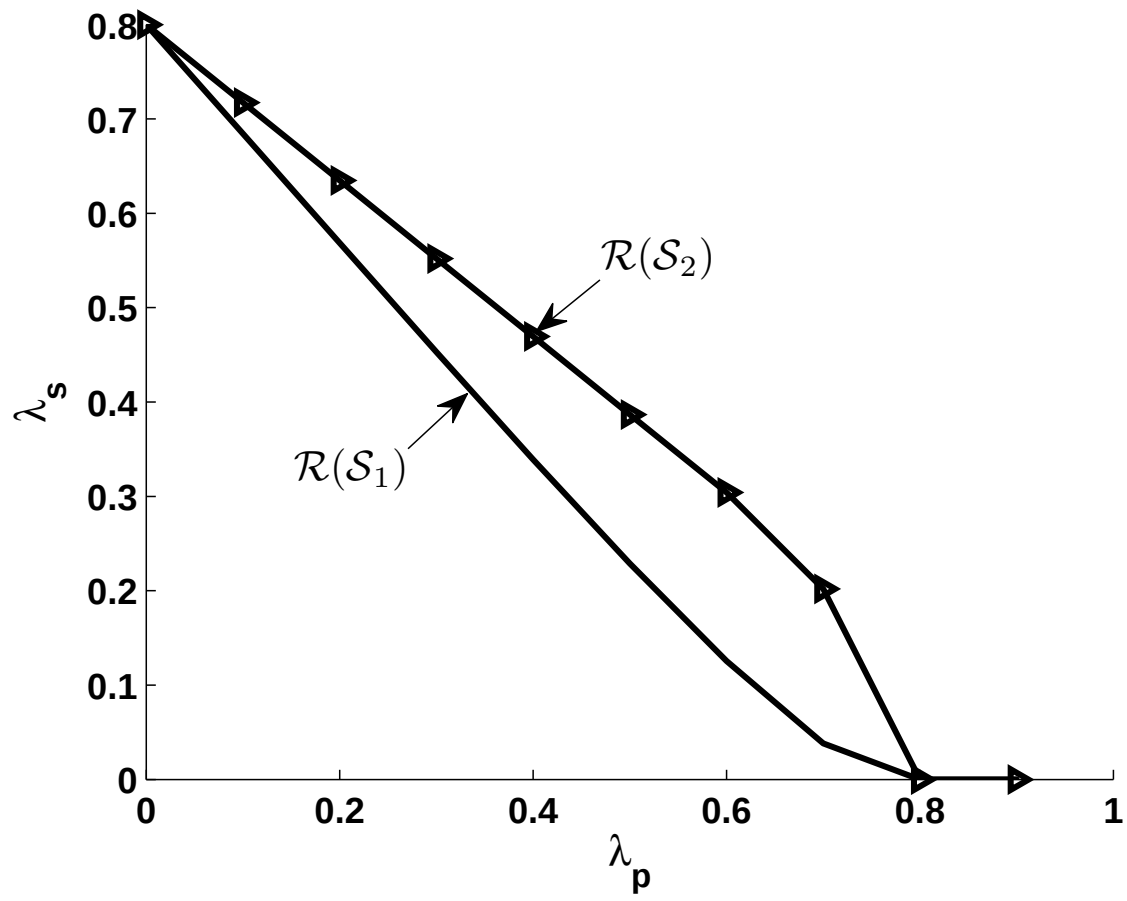


Fig. 3. Stability region of the dominant systems, the inner bound for the stability of the CSTR system is $\mathcal{R}(S_1) \cup \mathcal{R}(S_2)$.

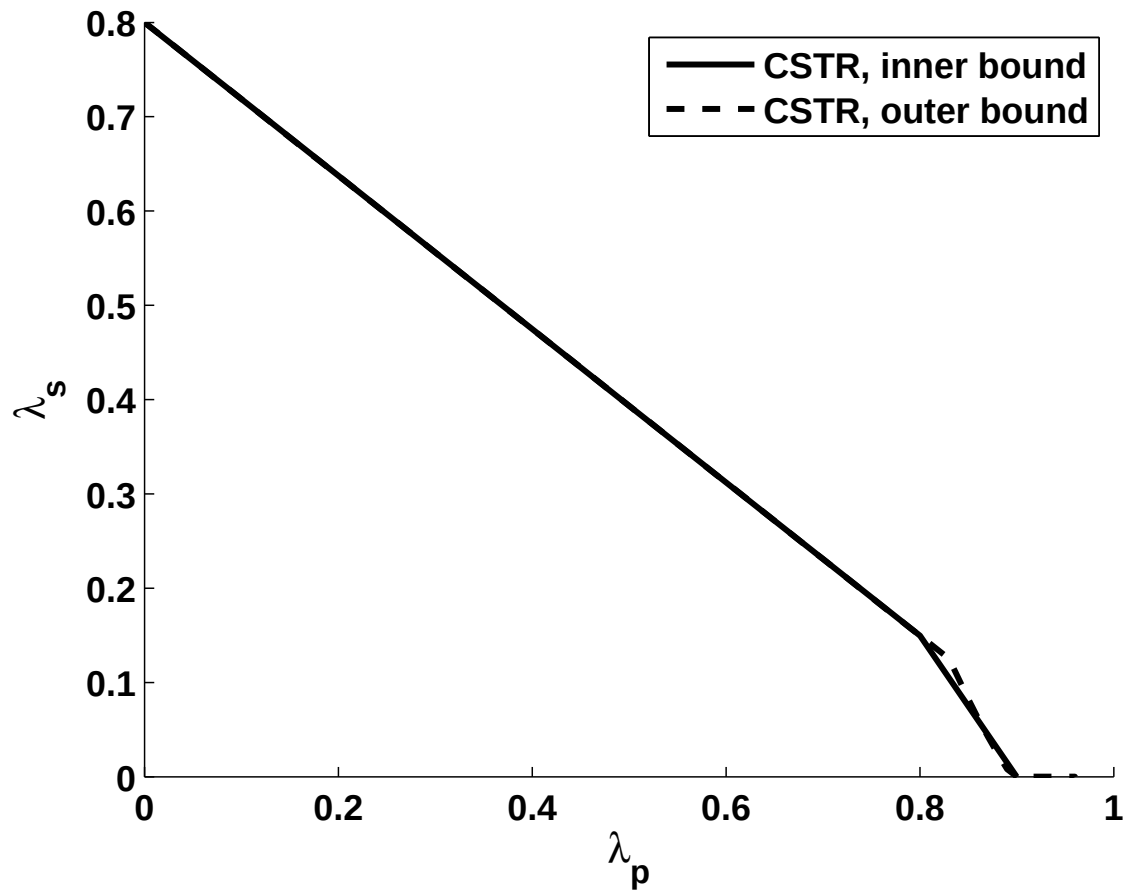


Fig. 4. Inner and outer bounds for CSTR: $P_{ps,pd} = 0.2$, $P_{ss,sd} = 0.2$, $P_{ps,ss} = 0.08$, $P_{ss,pd} = 0.08$, $P_{sd,pd} = 0.02$, and $P_{ps,sd} = 0.02$.

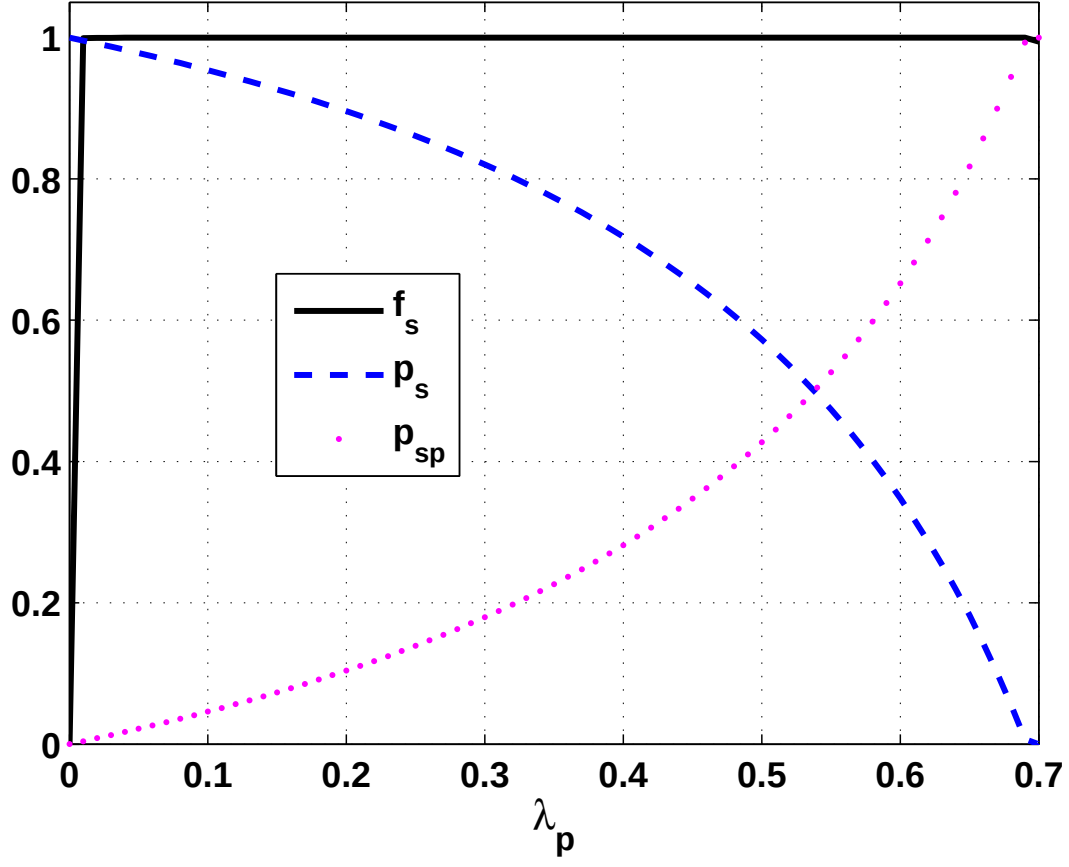


Fig. 5. The optimization parameters of the NCNPQ system: $P_{ps,pd} = 0.4$, $P_{ss,sd} = 0.2$, $P_{ps,ss} = 0.08$, $P_{ss,pd} = 0.08$, $P_{sd,pd} = 0.02$, and $P_{ps,sd} = 0.02$.

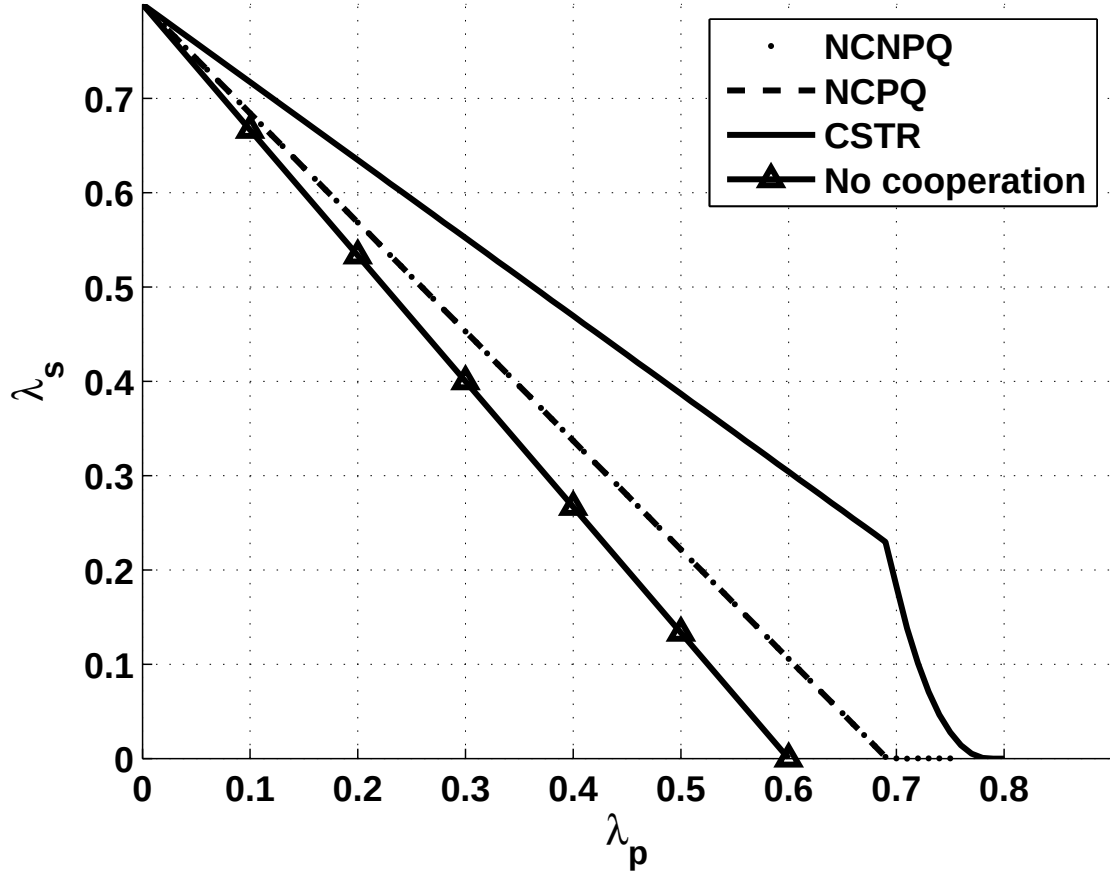


Fig. 6. Comparison between the maximum stable-throughput of the CSTR, NCPQ, NCNPQ, and the no cooperation case: $P_{ps,pd} = 0.4$, $P_{ss,sd} = 0.2$, $P_{ps,ss} = 0.08$, $P_{ss,pd} = 0.08$, $P_{sd,pd} = 0.02$, $P_{ps,sd} = 0.02$, $P_{ss,pd}^c = 0.2640$, and $P_{sd,pd}^c = 0.2160$.

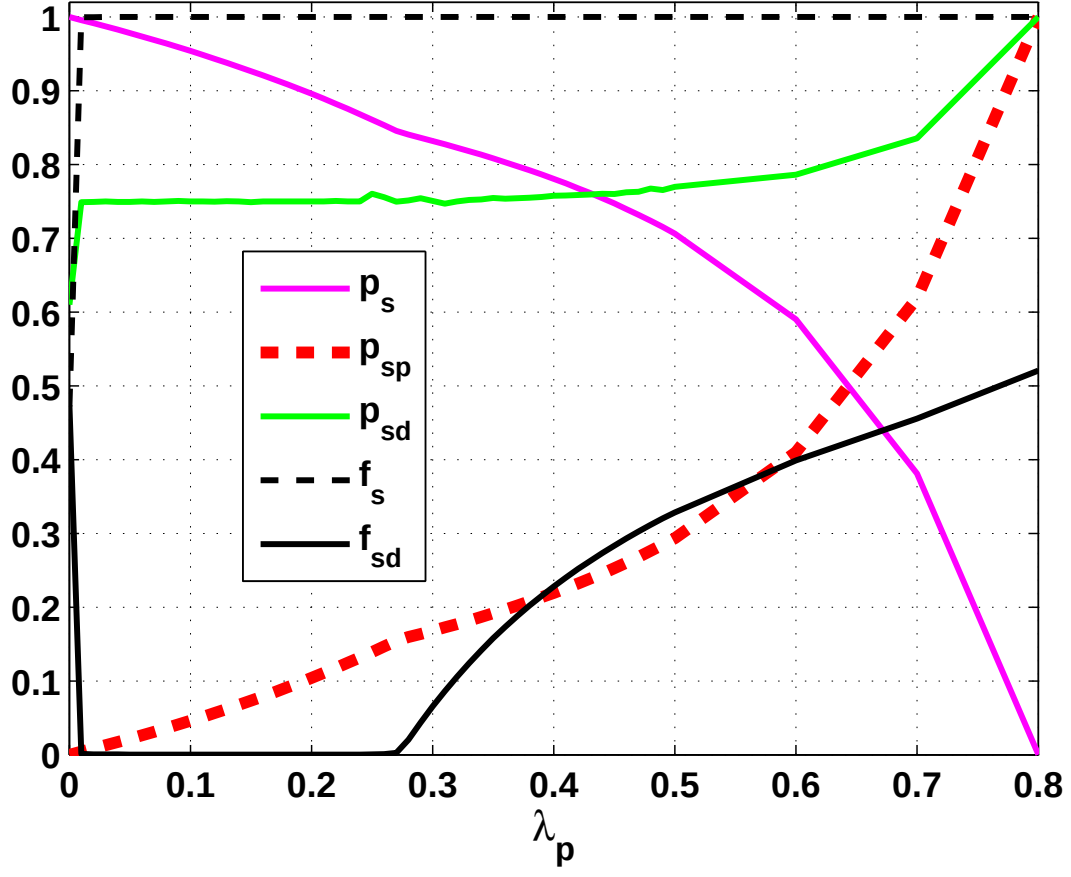


Fig. 7. The optimization parameters of the CSTR system: $P_{ps,pd} = 0.4$, $P_{ss,sd} = 0.2$, $P_{ps,ss} = 0.08$, $P_{ss,pd} = 0.08$, $P_{sd,pd} = 0.02$, $P_{ps,sd} = 0.02$, $P_{ss,pd}^c = 0.2640$, and $P_{sd,pd}^c = 0.2160$. The optimal value of the priority factor $\mathcal{P}^* = 1$.

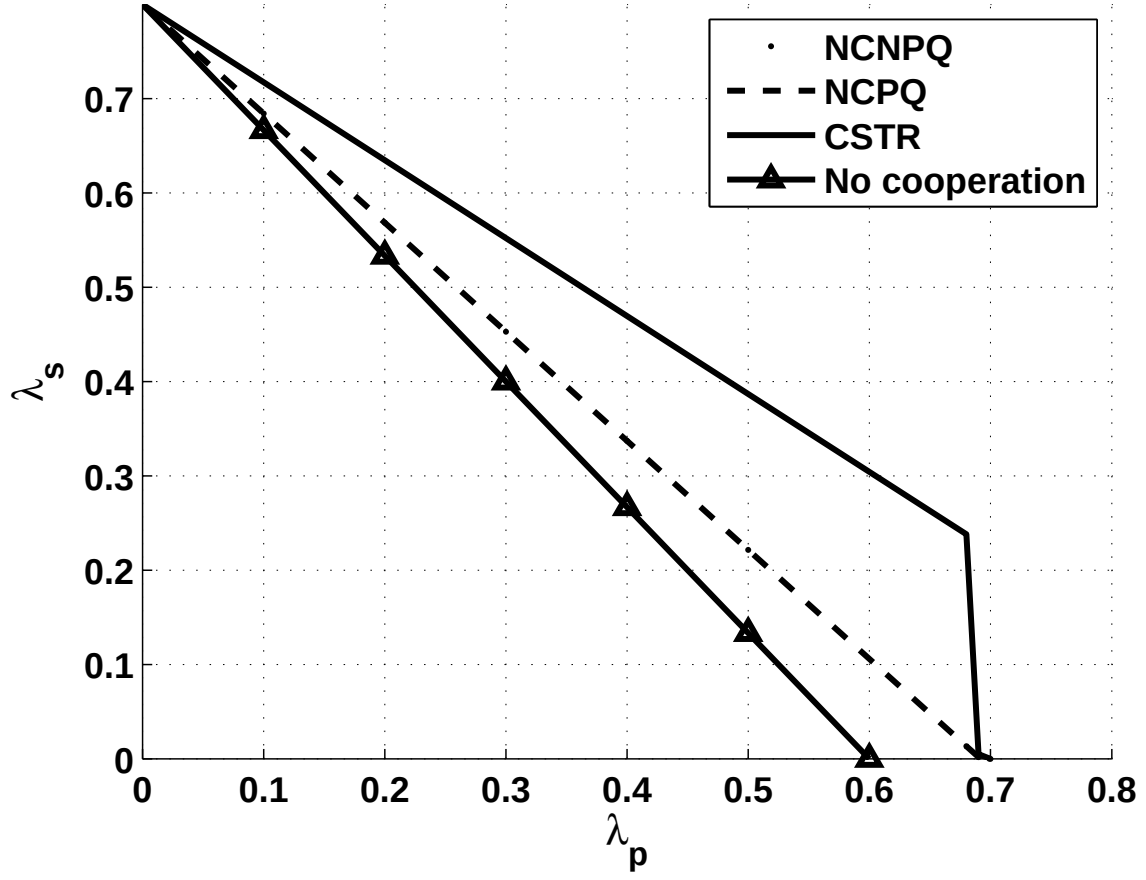


Fig. 8. Comparison between the maximum stable-throughput of the CSTR, NCPQ, NCNPQ, and the no cooperation case: $P_{ps,pd} = 0.4$, $P_{ss,sd} = 0.2$, $P_{ps,ss} = 0.08$, $P_{ss,pd} = 0.08$, $P_{sd,pd} = 0.02$, $P_{ps,sd} = 0.02$, $P_{ss,pd}^c = 0.54$, and $P_{sd,pd}^c = 0.51$.

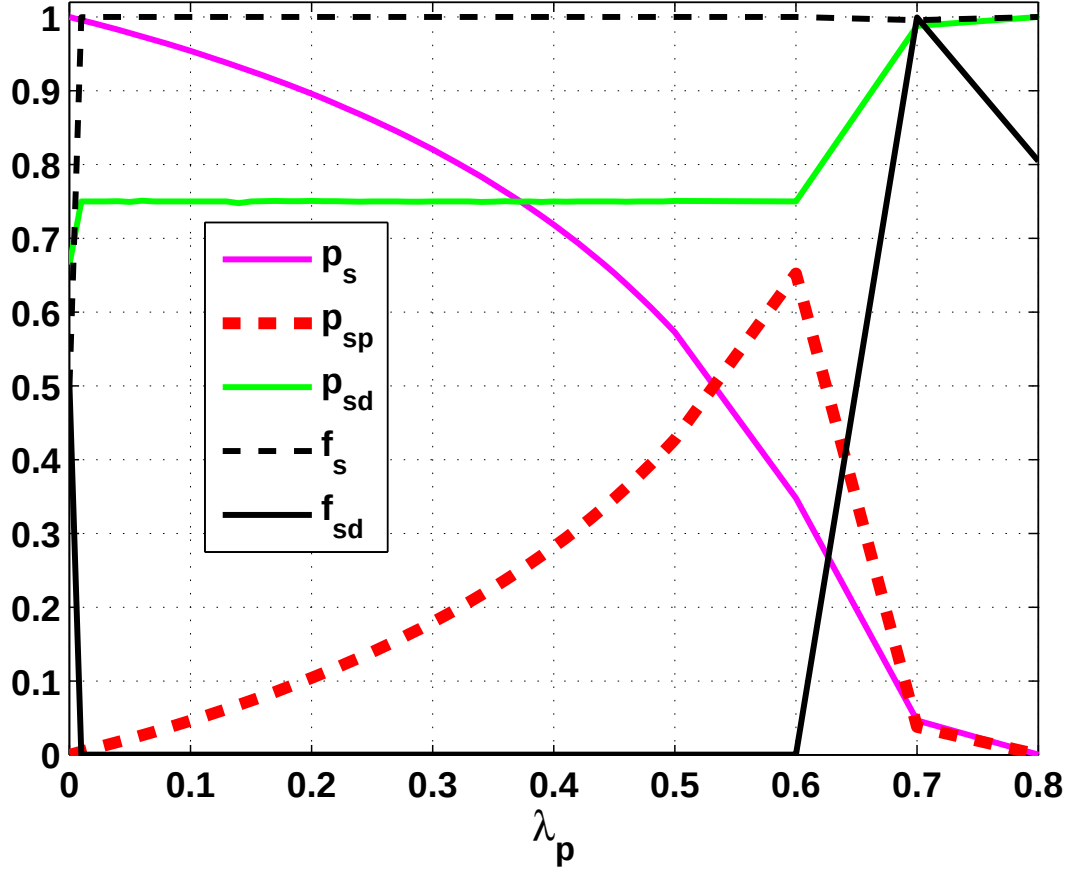


Fig. 9. The optimization parameters of the CSTR system: $P_{ps,pd} = 0.4$, $P_{ss,sd} = 0.2$, $P_{ps,ss} = 0.08$, $P_{ss,pd} = 0.08$, $P_{sd,pd} = 0.02$, $P_{ps,sd} = 0.02$, $P_{ss,pd}^c = 0.54$, and $P_{sd,pd}^c = 0.51$. The optimal value of the priority factor $\mathcal{P}^* = 1$.

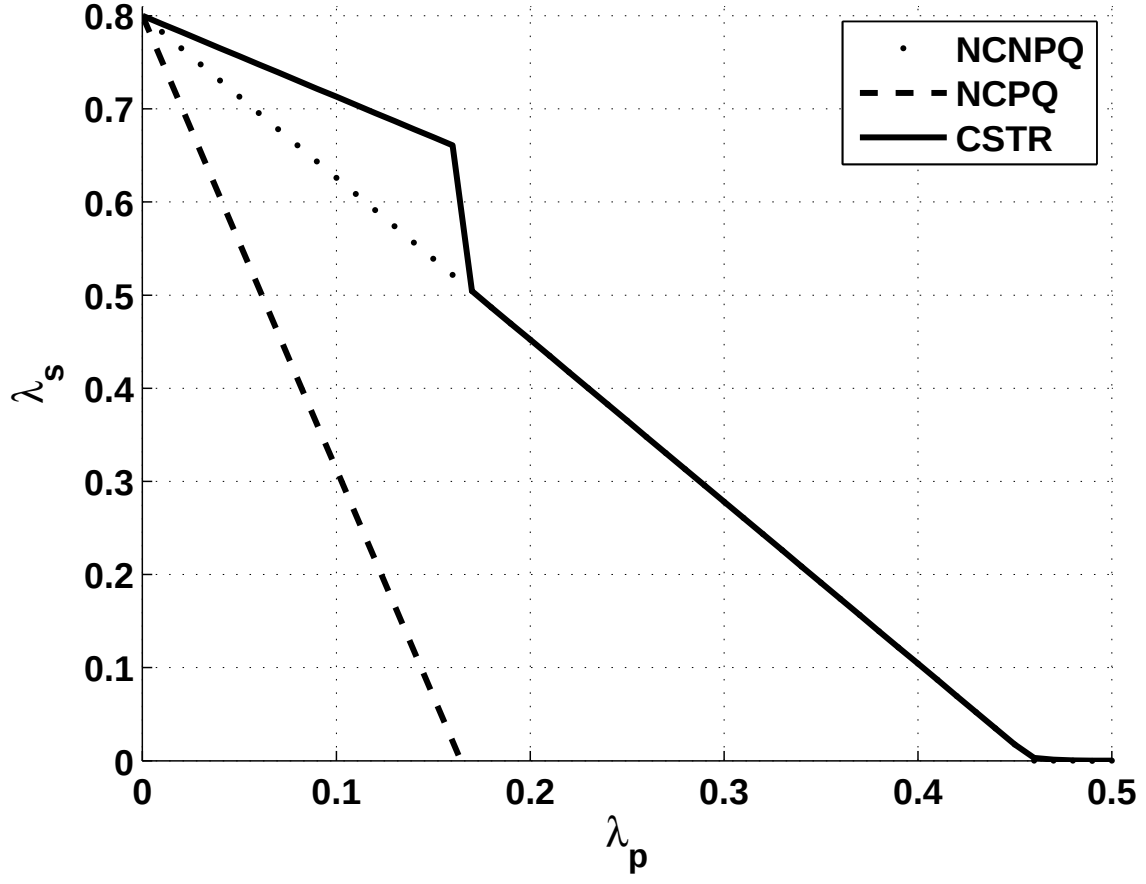


Fig. 10. Worst case comparison between the maximum stable-throughput of the CSTR, NCPQ, and NCNPQ systems: $P_{ps,pd} = 1$, $P_{ss,ss} = 0.2$, $P_{ps,ss} = 0.08$, $P_{ss,pd} = 0.8$, $P_{sd,pd} = 0.02$, $P_{ps,sd} = 0.02$, $P_{ss,pd}^c = 0.54$, and $P_{sd,pd}^c = 0.51$.

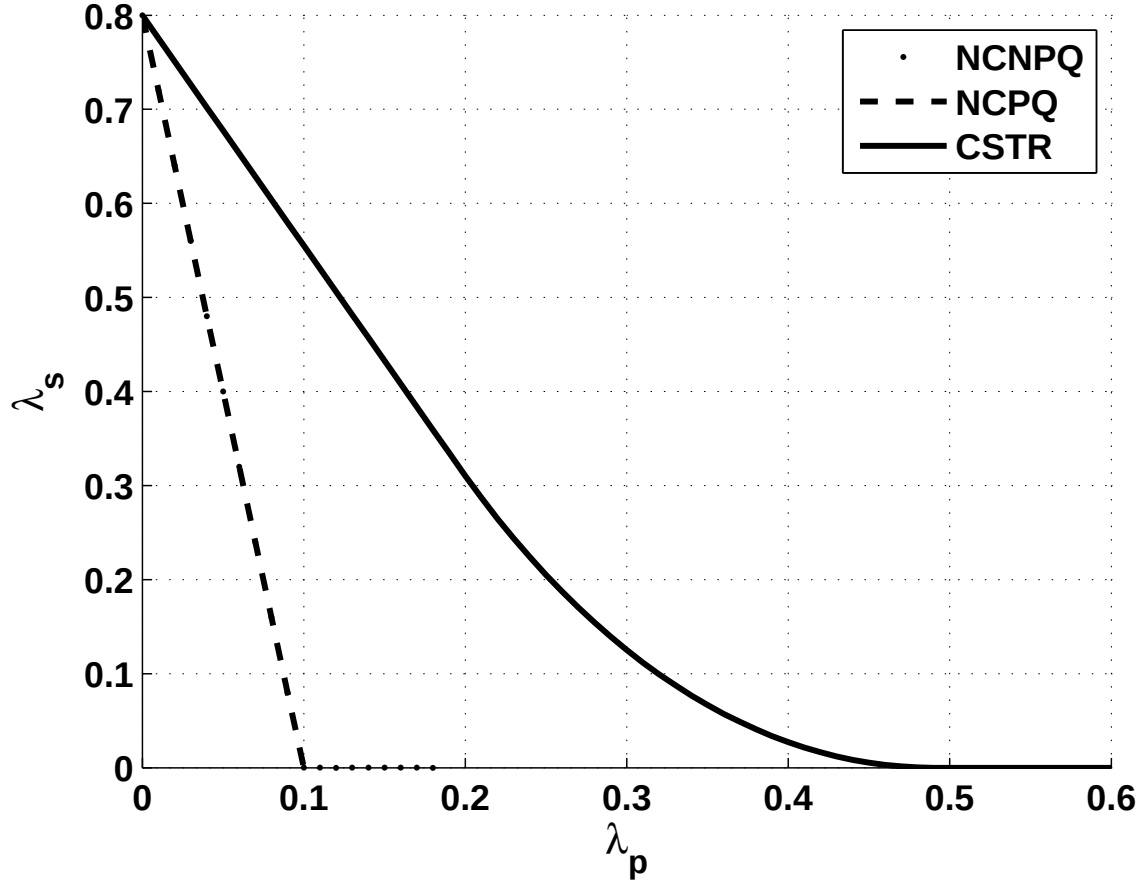


Fig. 11. Worst case comparison between the maximum stable-throughput of the CSTR, NCPQ, and NCNPQ systems: $P_{ps,pd} = 1$, $P_{ss,ss} = 0.2$, $P_{ps,ss} = 0.8$, $P_{ss,pd} = 0.8$, $P_{sd,pd} = 0.02$, $P_{ps,sd} = 0.02$, $P^c_{ss,pd} = 0.54$, and $P^c_{sd,pd} = 0.51$.

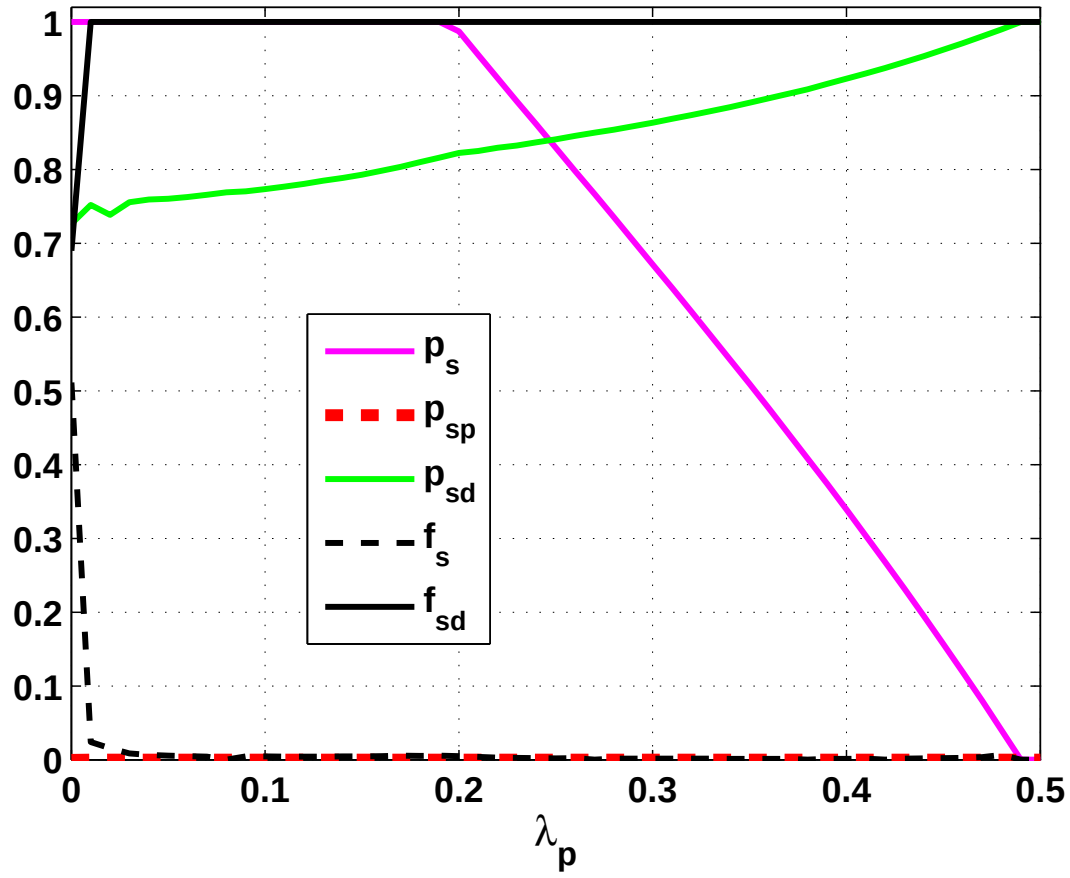


Fig. 12. The optimization parameters of the CSTR system: $P_{ps,pd} = 1$, $P_{ss,sd} = 0.2$, $P_{ps,ss} = 0.8$, $P_{ss,pd} = 0.8$, $P_{sd,pd} = 0.02$, $P_{ps,sd} = 0.02$, $P_{ss,pd}^c = 0.54$, and $P_{sd,pd}^c = 0.51$.

